



## VICONNECT – THE CLEVER CONNECTION

Installation systems and flush plates  
from Villeroy & Boch

# CONTENTS




## Dry-wall construction: Toilet installation systems \_\_\_\_\_ 8

Models and benefits



## Dry-wall construction: Installation systems for other areas of the bathroom \_\_\_\_\_ 14

Urinals, bidets, washbasins, shower trays,  
baths, service sinks, handles



## Wall drain units \_\_\_\_\_ 17

Wallway – for dry and mortared construction



## Features that stand out \_\_\_\_\_ 18



## Mortared installation: Toilet installation systems \_\_\_\_\_ 20

Models and benefits



## Flush plates \_\_\_\_\_ 24

Collections, models and benefits



## Other ViConnect benefits \_\_\_\_\_ 30

Plenty of scope for combinations with selected  
Villeroy & Boch collections and innovations



## Accessories \_\_\_\_\_ 33

Installation systems and flush plates

# ALL ACCORDING TO PLAN – ON BOTH SIDES OF THE WALL!

**Open up new planning possibilities while making your installation work significantly faster and easier. With wall connections that compensate for slanting and uneven surfaces and allow for corner installations. Offers excellent stability – something that is particularly advantageous with large-format tiles. Together with its timeless designer flush plates, ViConnect offers a complete bathroom solution for every building situation that is efficient, reliable and retrofittable – all from a single source.**



# REDESIGNED FOR GREATER SIMPLICITY

## Planning advantages

- Greater freedom and flexibility when planning
- Wide range of designer flush plates to match our portfolio
- Installation systems for toilets, bidets, urinals, washbasins, shower trays and more
- Toilet installation systems in various heights and compact in depth
- With options that can be easily retrofitted – and provisions for individual adaptations

## Technical advantages

- Adjustable flush flow restrictor can be adjusted without the need for special tools or removal
- Self-supporting steel frame, powder-coated
- Concealed cistern, fully-insulated against condensation, with dual flush
- Flush set at 3/6 l, can be adjusted to 4–3 / 7.5–4.5 l
- Integrated vertical struts for safe installation of toilets of all sizes – from compact toilets and toilets with a projection of 700 mm to low, narrow toilets and toilets with a large supporting surface (including with SupraFix 3.0, with high stiffness and load-bearing capacity)
- Rapid and intuitive installation of the flush plate from the front or from above thanks to innovative cable technology, as well as subsequent retrofitting – for example with a radio control
- Adjustable, self-locking feet permit simple, one-person installation, height-adjustable from 0–200 mm
- Easy-to-install waste bend with four settings
- Fully-assembled and incl. comprehensive fastening and connection materials
- Extended warranty, 25-year availability guarantee for replacement parts
- A full range of accessories and fastening elements are available

## Benefits for everyday use

- Faster cleaning thanks to an effective flush process that reduces splashing
- Models for all floor plans and bathroom applications (compact bathrooms, barrier-free, corner solutions, etc.)
- Ideal starting point for accessible bathrooms: from new builds to conversions
- Simple replacement of bathroom fittings and retrofitting (toilets with up to 400 kg load-bearing capacity, hygiene flush, support grips, sensor-controlled flush plates)
- Water-saving systems for lower utility bills
- ViConnect promotes sustainability by reducing the water consumption of all toilet flush plates with dual flush and adjustable flush speed



# TECHNICAL ADVANTAGES AT A GLANCE



## Wall mounting

Extremely flexible and included with almost all models



## Bayonet joints

Innovative cable technology saves time during installation

## Insulated against condensation

Cistern, fully-insulated against condensation



## Empty conduit

Optionally included as standard or as an accessory



## Integrated vertical support struts

For improved flexural strength and more secure supporting surface for modern, flat toilet designs



## Operation of cistern

From above or front

## 40 mm wide steel frame

For easy fastening of plasterboard



## Flush flow restrictor

For easy and fast adjustment to rimless toilets



## Pre-set flush 3 / 6 l

Can be adjusted 4–3 l / 7.5–4.5 l

## Adjustable holder

Adjustable holder for the waste bend with four settings for easier connections

## Bend-proof frame

Made from hollow rectangular profile, powder-coated



## Swivel system feet

With locking function for installation by one person

# VICONNECT – INSTALLATION SYSTEMS

You will find additional models on our Professional Portal

Toilet installation systems for dry-wall construction							
Article number	92242700	92246100	92246500	92247500	92247800	92247600	92215400
<b>Product designation</b>	Toilet installation system	Toilet installation system	Toilet installation system, "Free standing" Autopartant	Toilet installation system, low	Toilet installation system, low	Toilet installation system, compact	Toilet installation system for floor-standing kids toilets
<b>Installation height in mm</b>	1120	1120	1120	820	985	1120	1120
<b>Installation depth in mm</b>	135	135	165	155	155	90	135
<b>Empty conduit for shower toilet connection / wiring</b>	X	0	0	0	0	0	0
<b>3-part corner valve</b>	X	X	X	0	0	0	X
<b>Flush flow restrictor</b>	X	X	X	0	0	0	0
<b>Bulkhead</b>	X	X	0	X	X	0	0
<b>System feet incl. self-locking feature</b>	X	X	0	X	X	X	X
<b>Drain connector, reinforced and with four adjustment settings</b>	X	X	X	X	X	X	X
<b>Volume of flushing water</b>	6 / 3 l	6 / 3 l	6 / 3 l	6 / 3 l	6 / 3 l	6 / 3 l	6 / 3 l
<b>Possible settings</b>	7.5 / 6 / 4.5 l	7.5 / 6 / 4.5 l	7.5 / 6 / 4.5 l	7.5 / 6 / 4.5 l	7.5 / 6 / 4.5 l	6 / 4.5 l	7.5 / 6 / 4.5 l



## Further installation systems for dry-wall construction

Article number	92198900	92218500	92214800	92094000	92198300	92210900	92214900	92091800	92093400
<b>Product designation</b>	Urinal installation system	Urinal installation system for Pro Detect	Bidet system	Service sink system	Fastening element for handles, left	Fastening element for handles, right	Wash-basin system	Shower system for surface-mounted fittings	Shower system for concealed fittings
<b>Installation height in mm</b>	1120	1120	1120	1120	1120	1120	1120	1120	1120
<b>Installation depth in mm</b>	98	80	100	85	48	48	75	75	98
<b>System feet incl. self-locking feature</b>	x	x	x	x	x	x	x	x	x

## Toilet systems for mortared construction

## Wall drain unit

Article number	92247900	92248400	92248300	92248200	UCWAS0343	UCWAS0344
<b>Product designation</b>	Toilet system	Toilet system, compact	Concealed cistern	Concealed cistern, compact	Wall drain unit incl. frame, for dry-wall construction	Wall drain unit, for mortared construction
<b>Installation height in mm</b>	749	789	528	740 / 825	510	256
<b>Installation depth in mm</b>	125	80	125	80	135	135
<b>Empty conduit for shower toilet connection / wiring</b>	0	0	0	0	-	-
<b>3-part corner valve</b>	x	0	x	0	-	-
<b>Flush flow restrictor</b>	x	0	x	0	-	-
<b>Bulkhead</b>	x	x	0	x	-	-
<b>System feet incl. self-locking feature</b>	-	-	-	-	x	-
<b>Drain connector, reinforced and with four adjustment settings</b>	0	0	0	0	-	-
<b>Volume of flushing water</b>	6 / 3 l	6 / 3 l	6 / 3 l	6 / 3 l	-	-
<b>Possible settings</b>	7.5 / 6 / 4.5 l	6 / 4.5 l	7.5 / 6 / 4.5 l	6 / 4.5 l	-	-
<b>Drainage rate</b>	-	-	-	-	48 l / min	48 l / min

# TOILET SYSTEMS FOR DRY-WALL INSTALLATION

**Our installation systems for the toilet area offer broad supporting surfaces on the frame for mounting two abutting plasterboards. At the same time, height-adjustable feet make precise adjustment easy.**



## Installation video

Scan the QR code to call up the installation video.



### Standard

9224 27 00

Width 525 mm  
Height 1120 mm  
Depth 135 mm

With empty conduit



### Standard

9224 61 00

Width 525 mm  
Height 1120 mm  
Depth 135 mm



### Free-standing

9224 65 00

Width 450 mm  
Height 1120 mm  
Depth 165 mm

Ideally-suited for free-standing installation within the room thanks to its extremely strong frame





**Low**  
9224 75 00

Width 525 mm  
Height 820 mm  
Depth 155 mm

Fits under windows



**Low**  
9224 78 00

Width 525 mm  
Height 985 mm  
Depth 155 mm



**Compact**  
9224 65 00

Width 635 mm  
Height 1120 mm  
Depth 90 mm

Ideal for tight bathrooms

# TOILET INSTALLATION SYSTEM



## Standard with fitted empty conduit

**9224 27 00**

Width 525 mm | Height 1120 mm | Depth 135 mm

### Highlights

- Factory-fitted empty conduit for shower toilet connection / wiring
- Tool-free, adjustable flush flow restrictor
- Fully-assembled and incl. comprehensive fastening and connection materials
- Depth-adjustment of wall bracket 135–205 mm
- Incl. wall mounting with angled positioning also for corner installation



## Standard with options

**9224 61 00**

Width 525 mm | Height 1120 mm | Depth 135 mm

- Tool-free, adjustable flush flow restrictor
- Fully-assembled and incl. comprehensive fastening and connection materials
- Depth-adjustment of wall bracket 135–205 mm
- Incl. wall mounting with angled positioning also for corner installation
- Optional accessories for shower toilet connection available





## French “autoportant” with solid base\*

**9224 65 00**

Width 450 mm | Height 1120 mm | Depth 165 mm

### Highlights

- Reinforced profiles and base plates – ideally-suited for free-standing installation within the room: for example in combination with profile rails
- Tool-free, adjustable flush flow restrictor
- Fully-assembled and incl. comprehensive fastening and connection materials
- Depth-adjustment of wall bracket 165–215 mm
- Incl. wall mounting with angled positioning also for corner installation

\* this installation system is particularly suitable for France

## Installation beneath windows and in furniture

**9224 75 00**

Width 525 mm | Height 820 mm | Depth 155 mm

- Fully-assembled and incl. comprehensive fastening and connection materials
- Depth-adjustment of wall bracket 155–205 mm
- Incl. wall mounting with angled positioning also for corner installation





## Low model under one metre installation height

**9224 78 00**

Width 525 mm | Height 985 mm | Depth 155 mm

- Fully-assembled and incl. comprehensive fastening and connection materials
- Depth-adjustment of wall bracket 155–205 mm
- Incl. wall mounting with angled positioning also for corner installation

## Flat model with just 90 mm installation depth

**9224 76 00**

Width 635 mm | Height 1120 mm | Depth 90 mm

- Only 90 mm deep - ideal for tight bathrooms
- Fully-assembled and incl. comprehensive fastening and connection materials
- Depth-adjustment of wall bracket 90–170 mm
- Incl. wall mounting



# URINAL INSTALLATION SYSTEM



## Urinal installation system for manual flush plate

**9219 89 00**

Width 525 mm | Height 1120 mm | Depth 198 mm

- For manual urinal control via buttons
- Freely-adjustable connections
- Continuously-adjustable flushing time
- Depth-adjustment of wall bracket 135–205 mm
- Fully-assembled and incl. comprehensive fastening and connection materials

## Urinal installation system for electronic ProDetect control

**9221 85 00**

Width 525 mm | Height 1120 mm | Depth 80 mm

- For surface-mounted flush valve
- Freely-adjustable connections
- Continuously-adjustable flushing time
- Depth-adjustment of wall bracket 135–205 mm
- Fully-assembled and incl. comprehensive fastening and connection materials



# ADDITIONAL ELEMENTS FOR INTEGRATION INTO INSIDE WALLS

## Bidet frame system

**9221 48 00**

Width 525 mm | Height 1120 mm | Depth 100 mm

- An additional strut ensures that wall-mounted bidets enjoy perfect stability
- Free-positioning of water connections
- Scalable for installation
- Including sound-absorbing waste bend clamp and rubber sleeve DN 40
- Self-locking feet with adjustable base plates
- Height-adjustment of feet 0–200 mm
- Depth-adjustment of wall bracket 135–205 mm
- Incl. wall mounting with angled positioning also for corner installation



## Service sink frame system

**9209 40 00**

Width 525 mm | Height 1120 mm | Depth 85 mm

- Incl. sound-absorbing clamp and waste bend DN 50
- Universally adjustable for service sinks
- Self-locking feet with adjustable base plates
- Height-adjustment of feet 0–200 mm
- Depth-adjustment of wall bracket 135–205 mm
- Incl. wall mounting with angled positioning also for corner installation
- Fully-assembled and incl. comprehensive fastening and connection materials





## FASTENING ELEMENTS FOR HANDLES

**The practical solution for the barrier-free installation of folding grips or support grips from the ViCare collection. Possible installation positions include toilet or washbasin elements integrated into a back-to-wall or dry-wall construction. These elements can also be pre-installed so that support grips can be fitted as required at a later date.**

**9219 83 00 - Installation on left**

**9221 09 00 - Installation on right**

Width 310 mm | Height 1120 mm | Depth 48 mm

- Barrier-free installation of a handrail
- Self-locking feet with adjustable base plates
- Height-adjustment of feet 0–200 mm
- Depth-adjustment of wall bracket 135–205 mm
- Incl. wall mounting with angled positioning also for corner installation
- Fully-assembled and incl. comprehensive fastening and connection materials



# WASHBASIN FRAME SYSTEM



## 9221 49 00

Width 525 mm | Height 1120 mm | Depth 75 mm

- Also suitable for the sturdy installation of large washbasins
- Free-positioning of water connections
- Suitable for concealed siphon
- Depth-adjustment of wall bracket 135–205 mm
- Fully-assembled and incl. comprehensive fastening and connection materials


# SHOWER / BATH INSTALLATION SYSTEMS

## Element for surface-mounted tap fittings

### 9209 18 00

Width 525 mm | Height 1120 mm | Depth 75 mm

- Self-supporting steel frame, 40 x 30 mm, powder-coated
- Self-locking feet with adjustable base plates
- Height-adjustment of feet 0–200 mm
- Depth-adjustment of wall bracket 135–205 mm
- Incl. wall mounting with angled positioning also for corner installation
- Fully-assembled and incl. fastening materials

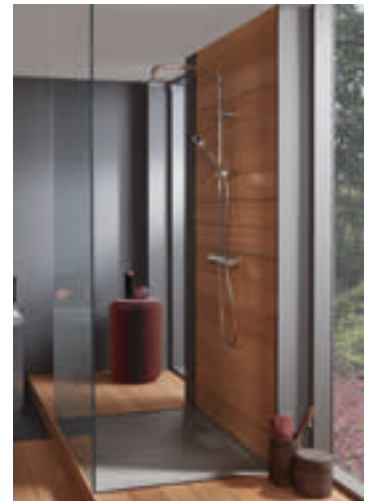

## Element for concealed tap fittings

### 9209 34 00

Width 525 mm | Height 1120 mm | Depth 135 mm

- Self-supporting steel frame, 40 x 30 mm, powder-coated
- Self-locking feet with adjustable base plates
- Height-adjustment of feet 0–200 mm
- Depth-adjustment of wall bracket 135–205 mm
- Incl. wall mounting with angled positioning also for corner installation
- Fully-assembled and incl. comprehensive fastening and connection materials

# WALL DRAIN UNITS – COMBINATION WITH WALLWAY



## Simple and elegant. Drain in the wall.

The combination of the ViConnect and Wallway collections represents the first generation of Quarry® shower trays with a wall drain for maximum hygiene and safety in the bathroom.

### Highlights

- Pre-fitted collar for sealing at wall and floor
- Certified sealing system
- Fully-assembled incl. comprehensive fastening and connection materials

### Further dry-wall installation features

- Self-supporting steel frame, 40 x 30 mm, powder-coated
- Self-locking feet for installation by one person
- Height-adjustment of feet 0–200 mm, swivel base plates
- Depth-adjustment of angled wall bracket 135–205 mm
- For Villeroy & Boch Wallway shower trays that are sealed and installed like tiles

### UCWAS0343

ViConnect wall drain unit incl. frame, for dry-wall installation


### UCWAS0344

ViConnect wall drain unit, for mortared installation




### Installation video

Scan the QR code to call up the installation video.

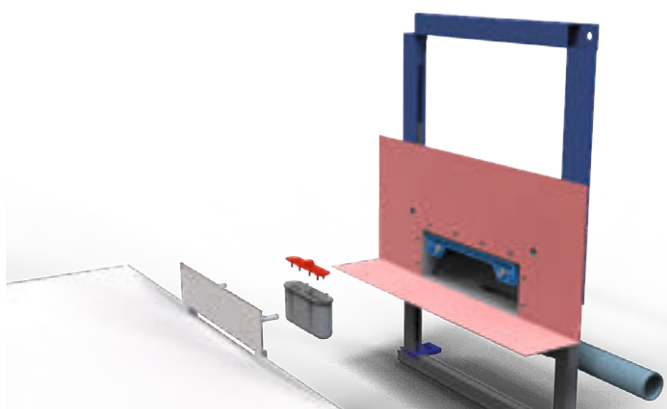

# FEATURES THAT STAND OUT

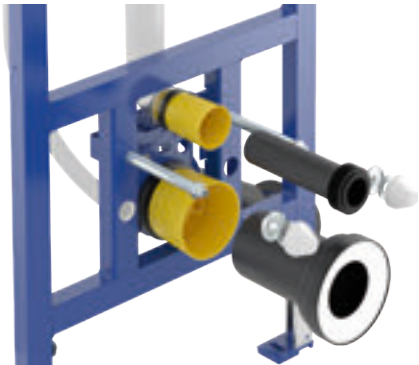

**Integrated vertical support struts** for improved stability with modern, flat designs. Thanks to the use of closed rectangular profiles, the steel frames for the installation systems exhibit extraordinary flexural strength.

SupraFix  
3.0



**Bayonet joint** ensures that cable technology can be connected quickly and securely. Bayonet joint to flush plate means that retrofitting an automatic flush is also simple. The innovative cable technology with metal pressure cables is also stable and flexible.




**Individually adjustable wall bracket** for greater flexibility of installation. This means you can even compensate for surfaces that are significantly slanted or uneven. The continuously-adjustable, swivel brackets are also suitable for easy installation in a corner.



**Height-adjustable, self-locking feet** allow for a range of installation options and are perfectly suitable for dry-wall constructions and for various metal profiles, including U-profiles and C-profiles.




**Front- or top-operated** in a single element with the same cistern.

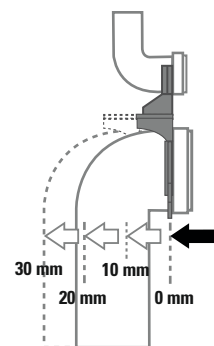

**Easy-to-install waste bend** with four settings ensures easier connections even in tight spaces.



**ViConnect is the epitome of efficiency and sustainability – including in terms of water consumption. With two flush settings, our installation systems and flush plates make it possible to save a great deal of water. The flush flow restrictor and the ProActive+ sensor plate allow for even more precise settings – and additional savings. Together with timeless designer flush plates, ViConnect is the perfect complete bathroom solution – sustainable and all from a single source.**

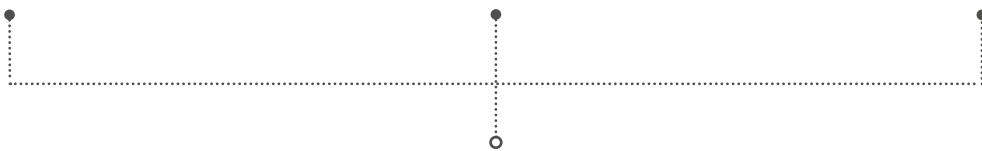

**All toilet flush plates with dual flush** can be switched from 4 l to 3 l, and from 7.5 l to 4.5 l. ProActive+ offers additional flush settings.



**Tool-free, adjustable flush flow restrictor**



**Sound-insulated filling valve** and reduced-noise flow thanks to ultra-quiet filling valve with excellent sound-insulation.




**Installation video**  
Watch how to set flush flow restrictor correctly in the video



# TOILET SYSTEM FOR MORTARED INSTALLATION

**With this system, the cistern is cleverly concealed within the wall. Thanks to the mounting bracket and pipe connector, installation is quick and intuitive. With the mortared construction elements, you can rely on the same high-quality components, functions, accessory options and flush plates as with ViConnect for dry-wall construction.**



## **Installation video**

Scan the QR code to call up the installation video.



## **Toilet system**

9224 79 00

Width 447 mm  
Height 749 mm  
Depth 125 mm



## **Toilet element, compact**

9224 84 00

Width 650 mm  
Height 786 mm  
Depth 80 mm





**Concealed cistern**

9224 83 00

Width 735 mm  
 Height 528 mm  
 Depth 125 mm



**Concealed cistern, compact**

9224 82 00

Width 648 mm  
 Height 740/825 mm  
 Depth 80 mm

# TOILET INSTALLATION SYSTEMS



## Model with steel frame and plastering aid

**9224 79 00**

Width 447 mm | Height 749 mm | Depth 125 mm

- Zinc-plated, U-shaped element
- Tool-free, adjustable flush flow restrictor
- Cable connection with bayonet joint to flush plate
- Concealed cistern with insulation against condensation with dual flush
- Flush set at 3 / 6 l, can be adjusted to 4–3 l/7.5–4.5 l
- Incl. fastening and connection materials

## Model with steel frame

**9224 84 00**

Width 650 mm | Height 789 mm | Depth 80 mm

- Zinc-plated, U-shaped element
- Cable connection with bayonet joint to flush plate
- Concealed cistern with insulation against condensation with dual flush
- Flush set at 3 / 6 l, can be adjusted to 4–3 l/7.5–4.5 l
- Incl. fastening and connection materials





## Concealed cistern

**9224 83 00**

Width 735 mm | Height 528 mm | Depth 125 mm

- Tool-free, adjustable flush flow restrictor
- Cable connection with bayonet joint to flush plate
- Concealed cistern with insulation against condensation with dual flush
- Flush set at 3 / 6 l, can be adjusted to 4–3 l / 7.5–4.5 l
- Incl. fastening and connection materials

## Exceptionally flat in the wall

**9224 82 00**

Width 648 mm | Height 740 / 825 mm | Depth 80 mm

- Cable connection with bayonet joint to flush plate
- Concealed cistern with insulation against condensation with dual flush
- Flush set at 3 / 6 l, can be adjusted to 4–3 l / 7.5–4.5 l
- Incl. fastening and connection materials



# VICONNECT FLUSH PLATES



## DESIGN 100

### Geometric eye-catchers

With their circular design, the 100S/100M toilet flush plates and 100SU urinal flush plate round off the bathroom in style.

#### Toilet flush plates

- Reduced water consumption thanks to dual flush
- Intuitive and tool-free installation thanks to innovative cable technology
- Easy-care and durable finish

#### Plastic (S)



White  
9224 85 68



Chrome  
9224 85 61

#### Stainless steel (M)



Chrome Matt  
9224 85 69



Stainless steel  
9224 85 LC

#### Urinal flush plates

- Single flush
- Rounded corners

#### Plastic (SU)



White  
9219 44 68



Chrome  
9219 44 61



Chrome Matt  
9219 44 69

# DESIGN 200



## Design with flush-fitting buttons

Toilet flush plates from the 200S/200G series provide subtle highlights in the bathroom. Thanks to the combination of soft corners and clear lines, they go well with all Villeroy & Boch collections.

### Toilet flush plates

- Reduced water consumption thanks to dual flush
- Intuitive and tool-free installation thanks to innovative cable technology
- Easy-care and durable finish

### Plastic (S)



White  
9224 90 68



Chrome  
9224 90 61



Chrome Matt  
9224 90 69




Black Matt  
9224 90 AN

### Glass (G)



Glass Glossy White  
9224 00 RE



Glass Glossy Grey  
9224 00 RA



Glass Glossy Black  
9224 00 RB

# DESIGN 200G/200M PROACTIVE+



## More hygiene – automatically!

For those looking to meet the highest comfort and hygiene requirements, we recommend our innovative ProActive+ solution. The timeless flush plate is sure to impress with a host of practical and intelligent functions. It is even possible to operate the flush without touching it – a simple hand motion is all it takes.

### Highlights

- Intelligent triple sensor flushing system
- Completely automatic flush or gesture control
- Additional manual push button
- Pre-flush for more hygiene and less residues
- Automatic main flush

### Other features


- Automatically determines whether a large or small flush volume is required by registering the duration of use and position
- LED lighting for orientation at night
- App control for flush settings including adjustment of the full flush (4.5 / 6 l flushing volume)



Glass Glossy White  
9223 11 RE



Stainless steel  
9223 11 LC

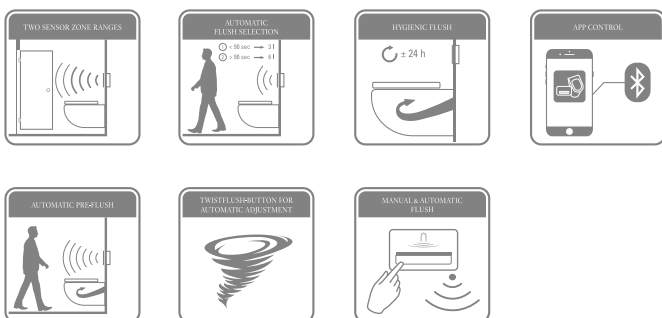

Get to know all of the advantages of ProActive+ here





## DESIGN 200G LED



### Highlight in the bathroom

The LED lighting that surrounds the 200G LED toilet flush plate provides handy orientation in the dark and creates a particularly pleasant bathroom ambience.

- Intuitive and tool-free installation thanks to innovative cable technology
- LED lighting for orientation at night
- LED light colour: 6000 - 6500 K (daylight white)
- Light control via touch dimmer



Glass Glossy Black  
9218 43 RB

## DESIGN 300G

### Stylish, elegant design of the glass surface

The 300G model is distinguished by its exquisite design featuring elegant glass surfaces. Thanks to its special installation frame, it can either be flush-fitted or surface-mounted. And even when surface mounted, it is only five mm thick.

#### Toilet flush plates

- Reduced water consumption thanks to dual flush
- Easy-care and durable finish



Glass Glossy White  
9221 60 RE



Glass Glossy Grey  
9221 60 RA



Glass Glossy Black  
9221 60 RB



# DESIGN 300S



## Elegant design with plastic surface

Create exclusive highlights in any bathroom. With seven different colour combinations, the 300S offers an appropriate design for all styles. And just like the 300G model, its amazingly slim design allows it to be either flush-fitted or surface-mounted.

### Toilet flush plates

- Reduced water consumption thanks to dual flush
- Intuitive and tool-free installation thanks to innovative cable technology
- Easy-care and durable finish



White / White  
9221 80 68



Chrome / Chrome  
9221 80 61



White Matt / Chrome Matt  
9221 69 N5



Anthracite Matt / Chrome Matt  
9221 69 D8



White / Chrome  
9221 61 68



Chrome Matt / Chrome Matt  
9221 80 69



Black Matt / Chrome Matt  
9221 69 AN

# KIDS SOLUTION



## A grown-up world for little heroes

The child-friendly design promotes independence and every detail has been tailored to ensure the highest possible hygiene and safety. O.novo Kids complies with the guidelines for construction projects in the education sector.

### Toilet flush plates

- Design 100S
- Colourful highlights for any bathroom
- Large, round actuator panel can be pressed easily
- The playful design makes it perfect for the O.novo Kids bathroom collection and ensures that operating the water-saving dual flush is child's play
- Intuitive and tool-free installation with innovative cable technology

### Design 100



Ocean Blue  
9223 74 9A



Cherry Red  
9223 74 P4



Sunshine Yellow  
9223 74 P5

## 9221 54 00

Width 525 mm | Height 1120 mm | Depth 135 mm

### Installation system

- Floor-standing toilet system for dry-wall installation
- Self-supporting steel frame, 40 x 30 mm, powder-coated
- Cable connection with bayonet joint to flush plate
- Height-adjustable, concealed cistern with insulation against condensation with dual flush
- Flush set at 3 / 6 l, can be adjusted to 4–3 l/7.5–4.5 l
- Self-locking feet with adjustable base plates
- Height-adjustment of feet 0–200 mm
- Depth-adjustment of wall bracket 135–205 mm
- Fully-assembled and incl. fastening and connection materials

**Wall-mounted toilets from the O.novo Kids collection are also suitable for use in combination with toilet installation systems for both dry-wall and brick-wall installation.**



# ONE COLLECTION – PLENTY OF SCOPE

## VICONNECT-DIRECTFLUSH



### The ultimate in hygiene

The rimless design enables very fast and thorough cleaning of the toilet. The entire inner bowl is flushed clean, efficiently without splashing. And all this with a flush of just 3 / 4.5 l. The design makes the toilet easier to clean – which saves time and money while ensuring hygiene and efficiency.


- Fast and easy cleaning
- The toilet's design has been optimised to ensure that the entire inside of the bowl is flushed completely
- Precise, splash-free flow of water right up to the rim
- Ideal water flow for maximum flushing effect
- Water-saving, with a flush using only 3 or 4.5 litres

### Synergies by combining with ViConnect

- The flush flow is optimised by the flush flow restrictor – this minimises the creation of aerosols while also making the toilet especially easy to clean
- Simple, fast and secure fastening with SupraFix fasteners
- Also suitable for mounting toilets up to 700 mm in length
- With suitable wall reinforcement for accessible solutions – can also be fitted as required at a later date
- Even more efficient with ProActive+



Discover all the advantages  
in this short video

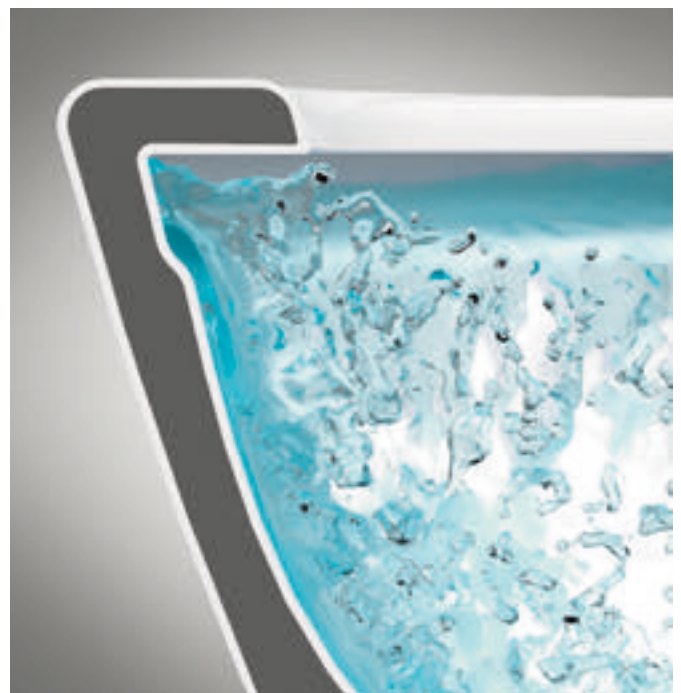



# VICONNECT-TWISTFLUSH



## More power, less water

Our patented swirling flush ensures optimum flushing and is highly water-efficient. Two nozzles generate a controlled flow of swirling water whose suction flushes away all soiling without a trace – ultra-quiet, with virtually no splashing and practically no need for a toilet brush.

- Strong and powerful swirl of water ensures optimum flushing
- The funnel-like geometry of the toilet bowl reduces soiling and therefore increases both hygiene and cleanliness
- Reduced water consumption: no need for repeated flushing
- A quieter flush thanks to the swirling flow of water
- Water-saving, with a flush using only 3 or 4.5 litres

### Synergies by combining with ViConnect

- The flush flow is optimised by the flush flow restrictor – this minimises the creation of aerosols while also making the toilet especially easy to clean
- Simple, fast and secure fastening with SupraFix fasteners
- Also suitable for installation in lengths of 700 mm
- With suitable wall reinforcement for barrier free solutions – can also be fitted as required at a later date
- Even more efficient with ProActive+, simply adjust in the app



Discover all the advantages  
in this short video



# VICONNECT-VICARE



## Design knows no barriers

With ViCare, Villeroy & Boch offers a complete bathroom collection for accessible bathrooms in all areas of life. Its wide-ranging portfolio meets the requirements of DIN-18040 and features aesthetics, comfort and functional design that are sure to impress. And ViCare encompasses the entire scope of accessible system solutions: from wheelchair-compatible washbasins and wheelchair-compatible toilets to extremely strong support grips.

- Durable and robust products
- Extended projection of this toilet facilitates the safe transfer to and from the wheelchair
- Smooth and joint-free surfaces for easy-cleaning
- High-quality accessories that comply with the EU Medical Device Directive (93/42/EEC)

## Advantages by combining with ViConnect

- Greater freedom in layout planning
- Easy retro-fitting without the need for elaborate conversions
- High load capacity of the ceramics, shower seats and handles
- More economical water consumption thanks to dual flush option
- Easy retro-fitting of ProActive+ flush plate for more independence, hygiene and comfort for those with motor disabilities



## Accessible bathrooms

Find out more about safe and modern bathroom design in accordance with DIN 18040.





# VICONNECT – READY FOR ANYTHING

Find the perfect accessories that customise your work and make it significantly easier. And discover the practical extras that provide a clever touch of convenience to any bathroom.



**9219 80 00**  
1/2" connection set,  
for installation with toilet  
installation system  
92246100 and 92242700



**9219 81 00**  
3/8" connection set,  
for installation with toilet  
installation system  
92246100 and 92242700



**9221 15 00**  
3/8" concealed connection set,  
for installation with toilet  
installation system  
92246100 and 92242700



**9209 15 00**  
Remote control for flushing unit  
with power supply, for control  
with hand-held transmitters for  
barrier-free bathrooms in ac-  
cordance with DIN 18040




**9209 26 00**  
Hygiene flush with battery.  
See previous product, with  
battery in place of power  
supply unit



**9209 19 61**  
Hand-held transmitter for radio  
control. Can easily be attached  
to the handles of the ViCare  
Function models



**9221 50 61**  
Pneumatic remote control  
for installation in furniture,  
to facilitate access

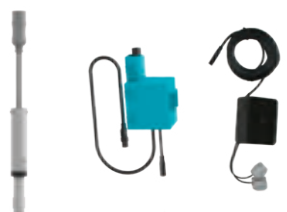

**9209 16 00**  
Hygiene flush with power  
supply unit. Pipe flushing in  
accordance with EN 806-5  
to avoid stagnant water



**9221 40 00**  
Odour extraction set for  
combination with exhaust  
air systems via connection  
to the flush pipe bend




**9218 51 00**  
Roughing-in set. Empty Conduit  
with mounts for water lines or  
power cables – only for installa-  
tion with toilet installation  
system 92246100 and ViClean

# FLUSH PLATE – ACCESSORIES

## Flush-mounted installation

The accessories for flush-fit installation are only to be used with flush plates from the Design 300 series.



### 9221 59 LC

Flush-mounted installation kit, stainless steel

- Installation kit for flush-mounted installation incl. enlarged protection plugs



### 9221 58 LC

Distance frame for flush-mounted installation set, stainless steel

- Distance frame for covering uneven tile edges
- In combination with flush-mounted installation set



### 9223 85 00

Extension set for flush plates, to compensate for thick wall structures

## Spare parts and accessories

### 9209 06 00

Roughing-in set


- Installation kit for ProActive+



### 9209 07 00

Motor unit, spare part

- Individual motor unit for ProActive+



### 9209 09 00

Power supply unit, spare part

- Power supply unit for ProActive+



### 9209 10 00

Radio receiver, spare part

- Option for operation with hand-held transmitters (accessories)



### 9209 08 00

LED module, spare part

- Light module for ProActive+

# VICONNECT – ALWAYS ON THE SAFE SIDE

The installation systems and flush plates from the ViConnect collection are notable for their long service lives and resilience. All products are manufactured in Germany and satisfy the strictest technical and quality standards. That is why we offer you an extended warranty on the entire ViConnect collection.

**WELL** Home  
Water Efficiency Label

---

Manufacturer: Sanit  
Product category: WC flush system  
Type: Flushing cistern  
Model: CC 121  
Registration number: WS10556-20130927

---

**A** **A\*\***

**B**

**C**

**D**

---

**Water Efficiency Criteria**

Flush volume 6,0 l	*
Flush volume 5,0 / 4,0 l	** ←
With flush stop function	*
Dual flushing	** ←

---

Information about use and installation: [www.well-online.eu](http://www.well-online.eu).  
A Label of EUUnited Valves  
European Valve Manufacturers Association



## Our warranty

- 25-year availability guarantee for functional individual parts
- 10 years for frames
- 5 years for cisterns
- 2 years for wear parts\* for flushing technology in the EU
- 2 years on flush plates
- 1 year for wear parts\* for flushing technology outside the EU

\* Warranty claims are subject to the condition of proper installation and use in accordance with the terms and conditions of use.



You will find more information  
on our Professional Portal



We're here for you!!

Do you have questions or suggestions  
on a current project?  
Our Service Team will help you  
quickly and competently!

Business Support Wholesalers:  
+49 (0)6864 81 2020

Plumbers, planners and architects:  
+49 (0)6864 81 1500

Technical questions and complaints  
All business forms:  
+49 (0)6864 81 4060

